

Loop Thread Breaking Detection Flat Bed Computerized Interlock



Jack Wechat



Jack Facebook



W4S

2019.11


JACK SEWING MACHINE CO.,LTD.

No.1008, Donghai Road East, Jiaojiang District, Taizhou city, Zhejiang, China
TEL: 0086-576-88177782 88177767
FAX: 0086-576-88177787


E-mail: sales@chinajack.com
www.chinajack.com

W4S

Item: loop thread breaking detection flat bed computerized interlock
 Features: loop thread breaking detection, Feed bar adjusting Wide adaptability

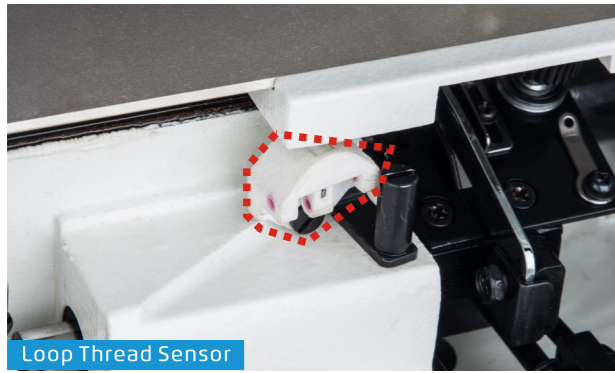

Loop Thread Sensor

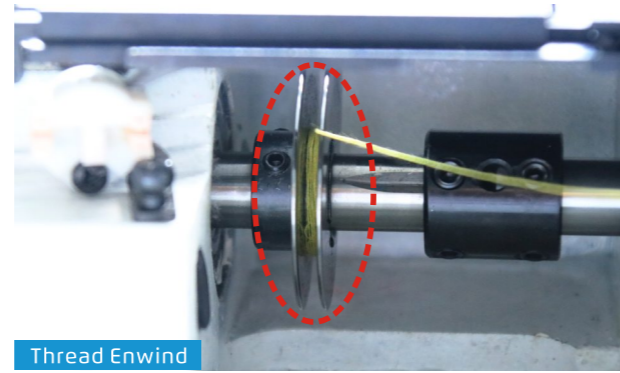

Thread Enwind

1 Loop Thread Breaking Detection Device

With loop thread breaking detection device, machine will stop before thread come into cam, save time, stop trouble.




Sewing Smoothly Over Ridges

No Garhering On Fabric

2 Feed bar adjusting, sewing smoothly

Adjust the feed bar to improve machine feeding ability for adapting fabric change. More beautiful stitch and smooth sewing.

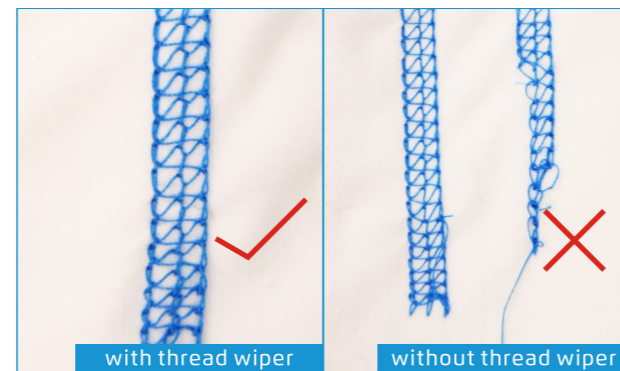


with thread wiper


without thread wiper

3 Wiper and upper loop thread trimmer can be used together

upper loop thread trimmer and up needle thread wiper work at same time. Auto-trimming and anti-starting stitch slip at the same time.

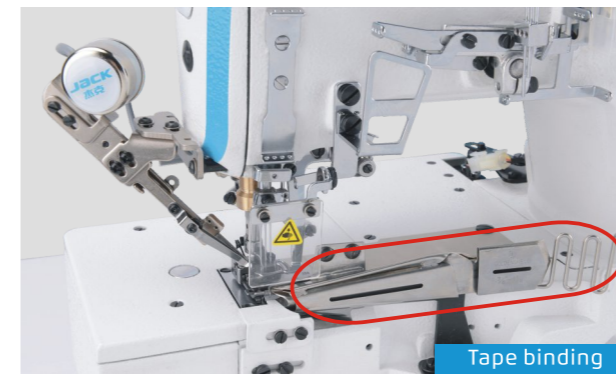


Tape binding

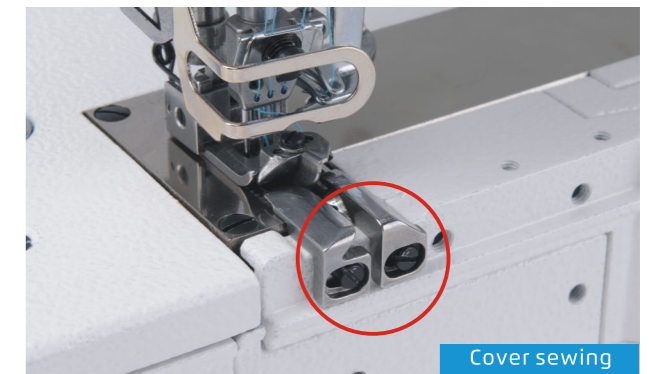

Cover sewing



Hemming sewing

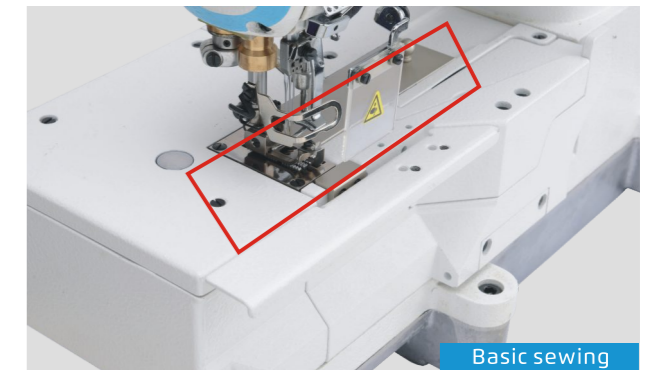

Basic sewing

4 Multi-function in one machine, suitable for various processes

One machine is capable for 01GB/ 02BB/03DB/08AC. For kinds of function in one flat bed, suitable for various process sewing.

Specification

Model	Functions	Needle	Needle No.	Thread No.	Stitch Length (mm)	Stitch Width (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (S.p.m)	Volume (mm)	Weight (kg)
W4S-UT-01GB	Plain Seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W4S-UT-02BB	Tape Binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	6	5500	670×445×595	54/64
W4S-UT-03DB	Covering Stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W4S-UT-08AC	Bottom Hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W4S-D-01GB	Plain Seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4S-D-02BB	Tape Binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	6	5500	670×445×595	48/58
W4S-D-03DB	Covering Stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4S-D-05CB	Elastic Lace Attaching (Right-Side Cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	6	4000	670×445×595	48/58
W4S-D-07CB	Elastic Lace Attaching	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4S-D-08AC	Bottom Hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4S-D-23GB	Plain Seaming (Large Stitch Length)	UY128GAS 11-14#	3	5	6	5.6/6.4	0.65-1	7	4000	670×445×595	48/58
W4S-D-23BB	Tape Binding (Large Stitch Length)	UY128GAS 11-14#	3	5	6	5.6/6.4	0.65-1	7	4000	670×445×595	48/58
W4S-D-23GBL	Plain Seaming (Extra Large Stitch Length)	UY128GAS 11-14#	2	4	7-7.5	5.6/6.4	1	7	4000	670×445×595	48/58
W4S-D-23BBL	Tape Binding (Extra Large Stitch Length)	UY128GAS 11-14#	2	4	7-7.5	5.6/6.4	1	7	4000	670×445×595	48/58

Note: UT: computerized, D:direct drive